


End Emitting Optical fiber



- Emitting over 30 meter without light dimming and color change
- Flexible and twistable, allowable bending radius is 10mm
- Wide wavelength range: 380-780nm
- No heat emit, No Ultraviolet, No electric, safety for Inflammable and explosive occasions, safety for under-water

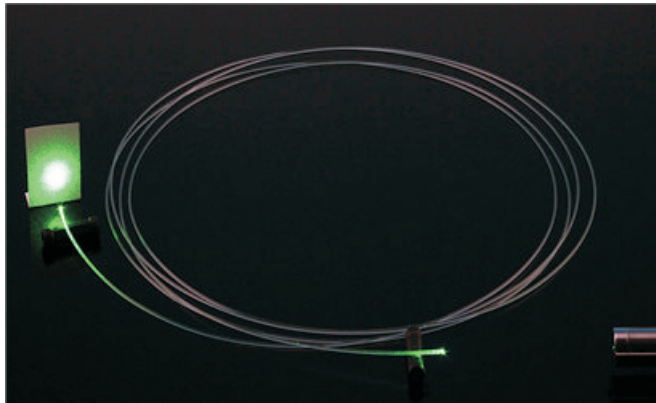

- Available in fully dielectric version: 0.25mm, 0.5mm, 0.75, 1.0mm, 1.5mm, 2.0mm, 3.0mm
- Shapeable and fictile, can be used in starry ceiling, home decoration, Gardon light, etc.

Models

Item	Diameter	Roll length	Attenuation	Package weight	Package Size
EEOF0.25	0.25mm	12000m	<300dB	3.0 kg	30*30*12cm
EEOF0.50	0.50mm	6000m	<300dB	3.0 kg	30*30*12cm
EEOF0.75	0.75mm	2700m	<300dB	3.0 kg	30*30*12cm
EEOF1.0	1.0mm	1500m	<300dB	3.0 kg	30*30*12cm
EEOF1.5	1.5mm	700m	<300dB	3.0 kg	30*30*12cm
EEOF2.0	2.0mm	350 m	<300dB	3.0 kg	30*30*12cm
EEOF3.0	3.0mm	150m	<300dB	3.0 kg	30*30*12cm

